




DESCRIPTION

The P3AC24-16-14 is a CCTV power center engineered to manage remote camera and accessory power requirements. The P3AC24-16-14 distribution module is designed with 16 individually fused outputs for powering up to 16 CCTV cameras and accessories.

It will provide 24 Volts AC via distribution to sixteen fused outputs with a total of 14.5 Amps continuous supply current. The P3AC24-16-14 power center is housed in the premium P3 lockable heavy gauge metal enclosure.

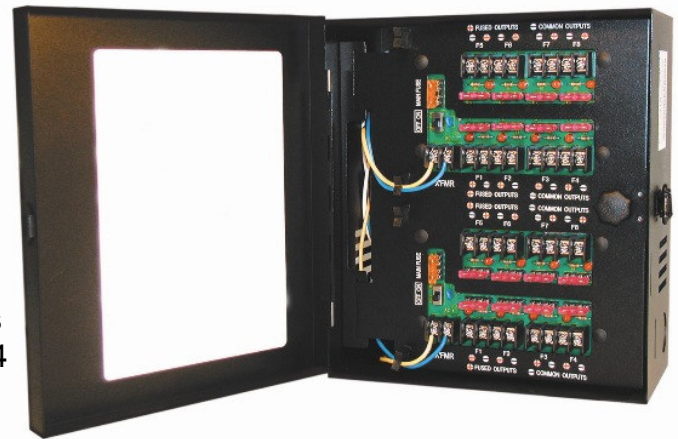

FEATURES

- Convenient screw terminal and fuse access.
- Power ON/OFF switch.
- AC power LED indicator.
- Individual LED's for each fused output.
- Lockable heavy gauge metal enclosure.
- Multiple knockouts to accommodate various wiring configurations.
- Double coated polyurethane finish.
- Uses easy to find automotive style fuses.
- Includes transformers and spare fuses.
- Available in 28VAC version.
- Available with optional circuit breaker, **P3AC24-16-14CB**.

SPECIFICATIONS

- Input 115VAC 50/60 HZ; 2.7 Amps.
- Sixteen 24VAC individually fused outputs.
- 14.5 Amps 350 VA supply currents at 70°F.
- Output fuses are rated at 5 Amps.
- Main fuse is rated at 15 Amps.
- Unit maintains camera synchronization.
- Transformer: (2) 110/24VA, 175VA.
- Enclosure dimensions: 10" (H) x 9" (W) x 4.5" (D).